




AHB-E1080-VF4-1

Analog CCTV camera



CAUTION!

- · Before providing power for the camera, please read this User Guide in detail!
- Do not attempt to disassemble the camera. If the camera is not working, please contact local reseller
 or our company.
- To prevent electric shock and risk of fire hazards, do not use other power source than specified.

ANALOG CAMERA QUICK INSTALLATION AND OPERATION GUIDE

V 1.0_201501

COPYRIGHT & TRADEMARKS

We reserve the right to change the product specification without notification. **@8level** is a registered trademark of Blevel. No part of the manual may be reproduced, translated or processed in any other form without permission from Blevel NEXT LEVEL IN NETWORKING. All rights reserved. Copyright © 2011 Blevel.

CE DECLARATION OF CONFORMITY

The product fulfills the following requirements according to:



EMC Directive 2004/108/EC

SAFETY NOTICE

Do not use this product near water. Do not place heavy objects on the casing.

RECYCLING NOTICE

The symbol of the crossed-out wheeled bin on this product means that it is forbidden to place the equipment waste together with other waste (under penalty of fine). Detailed information about recycling of the product can be obtained at local authorities, local waste treatment plants or local distributors. Forwarding the equipment waste to recycling or recovery points helps to avoid the negative influence of the

Forwarding the equipment waste to recycling or recovery points nelps to avoid the negative influence of the harmful components present in the equipment on the environment and human health; in this scope the primary role is played by each household.

www.8level.eu

SPECIFICATION

Sensor	1/2.7" F22 CMOS Sensor
Lens	2.8-12mm Manual Zoom lens
Signal System	1080P
Effective Picture Elements	PAL/NTSC: 1920*1080
Horizontal Resolution	1920H
Minimum Illumination	Color: 0.1Lux @(F1.2,AGC ON),0 LUX with IR
	B&W: 0.01 Lux @ (F1.2,AGC ON),0 LUX with IR
S/N Ratio	More than 69dB
Scanning System	2:1 interface
Synchronous System	Internal, Negative sync.
Auto Electronic Shutter	1/50(1/60)S-1/100,000S
Gama Characteristic	0.45
Day and Night Function	Support IR-CUT
IR Distance	40 Meters (with ¢ 12 x 6PCS Infrared LED)
IR Status	Under 10Lux by CDS
IR Power On	CDS AUTO Control
Video Output	HD-AHD Output(75Ω/BNC)
Auto Gain Control	Auto
Power/Current	DC12V/750mA ±10%
Storage Temperature	-30~+60°C RH95% MAX
Operating Temperature	-10~+60°C RH95% MAX
Weight	1.2kg
Dimension (mm)	158(L)*60(D)*60(W)mm

PROBLEMS AND SOLUTIONS

No picture after providing power

- · Check the power supply voltage and polarity
- · Check the video connections (cable, plugs)

Picture is too dark

- · Check the monitor and DVR screen setup (brightness, contrast)
- · Check the power supply voltage
- Check the video cable length and impedance. With the cable length exceeding 300m (RG59 or UTP5 cable) you may
 experience a lowering of video signal quality. In such case please use an external video signal amplifier, or shorten
 the video cable.

The video has horizontal flowing stripes

Check the power supply. Too high or too low voltage may be the source of this phenomenon. In such case, please
change the power source.

The video flickers, changes colors

- Check if the camera is facing the direct sunlight or a strong source of fluorescent light. If so, please change the camera angle.
- Check if the observation background is lit with strong fluorescent light. Reduce the fluorescent lamp numbers or increase the distance between the camera and the fluorescent lamps.


CAUTION!

- Use only CE certified power source. Its' output voltage, current, voltage polarity and operating temperature must
 match the camera's requirement. When using the camera in the thunderbolt condition, please mount an additional
 Anti-thunder device.
- Avoid using the camera at too high or too low temperatures.
- Avoid the camera facing the sun or very bright source of light. Otherwise, it can result in CCD damage.
- · Do not mount the camera nearby the radiator or heater.

PACKAGE CONTENT

- Analog CCTV camera
- Quick Installation and Operation Guide with CE Certificate

CONNECTION DIAGRAM

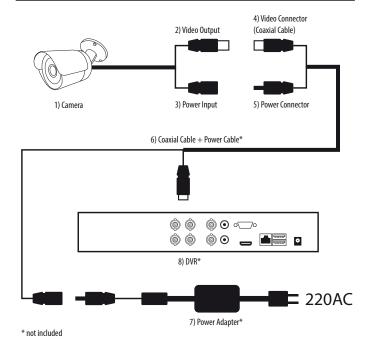



8level NEXT LEVEL OF NETWORKING DECLARATION OF CONFORMITY

For the following equipment:

Product description: Analog security camera

Model No.: AHB-E1080-363-1, AHB-E720-VF4-1, AHB-E1080-VF4-1

Trademark: 8level

We declare under our own responsibility that the above products, satisfy all the technical regulations applicable to the product within the scope of Council Directives:

Directives EMC 2014/30/EU

The above product is in conformity with the following standards or other normative documents

EN 55022:2010 EN 55024:2010

EN 61000-3-2:2014

EN 61000-3-3:2013

Person is responsible for marking this declaration





NNYLINE COMPUTER PRODUCTS POLAND SP. Z 0.0 ul. Granicana 588, 62-081 Przeźmierowo - Polska